

AC 1100

Cummins
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	1100,00	880,00	1000,00	800,00	1443,00

fPGE

GC,) &

,) & z

fDF DE

%\$!

%

%&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

ALTERNATOR

fl

!

!"

fl

!"

E

fP \$\$\$# \$\$\$

fl

!"

\$

E

!

TRANSFER SWITCH

AC 1100

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QST 30 G4		
		% \$ \$	"# "	
		970,00 kw [1300,00HP]		
	L	30,480		
	"	140 x 165		
		14,0:1		
	fl # 7	"# "	1500	
	fl 7	L	154,00	
		L	342,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	60,30		
fl ' # 7	' # "	1111,00		
	' # "	178,80		
	° C	575,00		
		24 V d.c.		
	Load	% \$ \$	'+)) \$
	# "			
		202,00	151,00	102,00


		Mecc Alte		
		ECO 43-1LN/4		
	Hz	50		
	"	1100,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	1587,00		
Temperature		H		

		fl 7		fl 7	
	"	"	"	"	L
AC 1100	7350,00	4400,00	1776,00	2341,00	1500,00
		fl 7		fl 7	
	"	"	"	"	L
AK 96	11000,00	7500	2300	3170	1500

AC 1100

Cummins
Mecc Alte
D+' &'

1 D+' &'

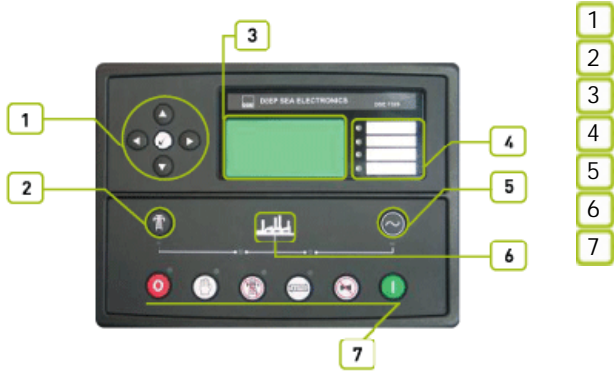

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž ž

8G9+' &\$ž 8G9+' &\$ž

ž

% &1 * (

žFG&' &žFG(,) ž

ž

AC 1100

Cummins
Mecc Alte
D+ &

f@#@Bt
f@#@@t

"z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&)% +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 1100

Cummins
Mecc Alte
D+ & "

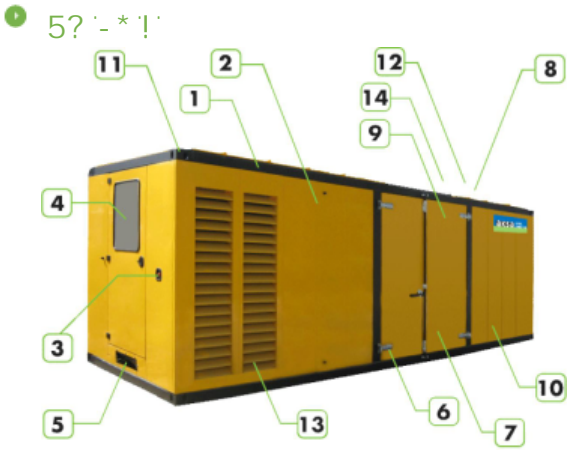

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lifting points
- 11 Lockable door similar to ISO container , located on each top corner of the canopy
- 12 the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	3170
	L	1500